

SERIES 161L COMPACT STYLE



Brass ball valve, FNPT threaded, full port sizes 1/2" to 4", with latch lock handle.

- Pressure rating 600 WOG-150 WSP.
- Temperature range -4°F to 366°F.
- Blow out proof stem, chrome plated brass ball.
- P.T.F.E. seats and double O-ring stem packing.
- 100% electronically tested in the open and closed position at 80 psi.
- Not to be used for drinking water.
- Valve to be used in fully open or fully closed position.
- ANSI B1.20.1 connections.

For sizes 1/4", 3/8" see 171L.



400 WOG

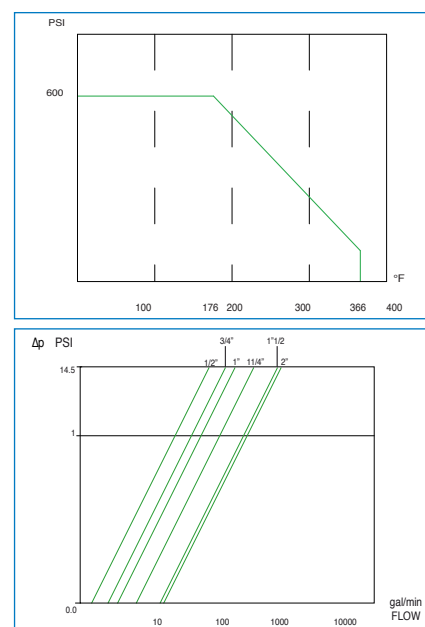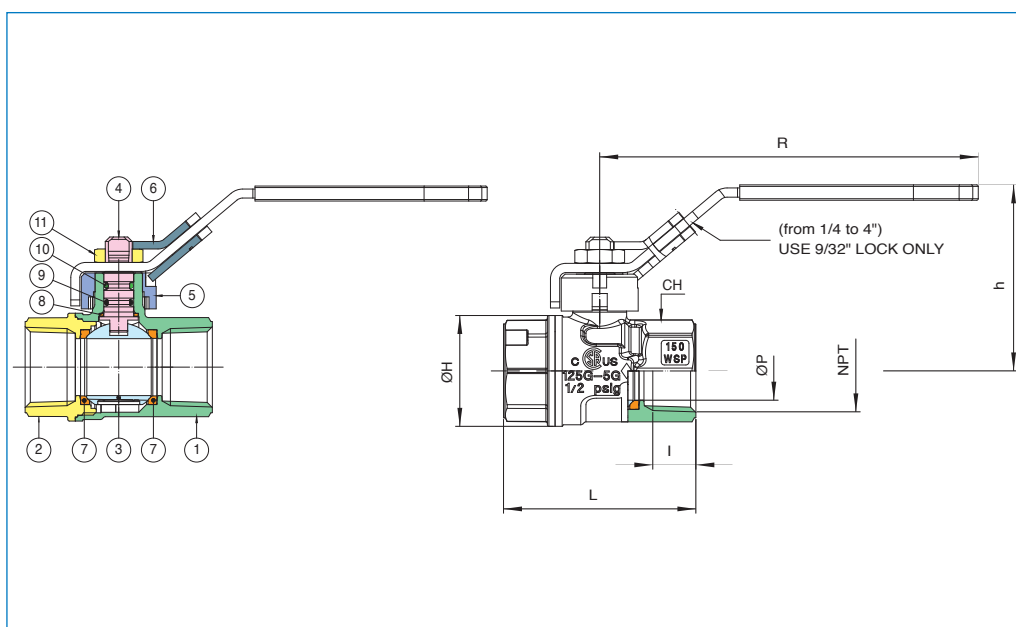

N POS	PART NAME	MATERIAL	N PCS
1	BODY	BRASS C38000	1
2	END CONNECTION	BRASS C38000	1
3	BALL	BRASS C38000	1
4	STEM	BRASS C38500	1
5	BUSH	G Zn Al4	1
6	HANDLE	STEEL DD11	1
7	BALL SEAT	P.T.F.E.	2
8	THRUST WASHER	P.T.F.E.	1
9	O-RING	NBR	1
10	O-RING	FKM (Viton®)	1
11	NUT	STEEL CL04	1

SIZE	ØP	I	L	ØH	CH	R	h	Cv	psi	Weight Lbs
1/2"	0.55	0.54	2.22	1.18	0.98	3.78	1.91	18.15	600	0.46
3/4"	0.75	0.55	2.46	1.42	1.22	4.84	2.38	32.37	600	0.79
1"	0.94	0.66	3.01	1.71	1.50	4.84	2.48	47.98	600	1.10
1 1/4"	1.19	0.68	3.37	2.09	1.89	5.94	3.01	97.80	600	1.78
1 1/2"	1.50	0.68	3.70	2.56	2.13	5.94	3.23	252.60	600	2.34
2"	1.95	0.70	4.31	3.39	2.64	6.30	3.78	290.75	600	4.03
2 1/2"	2.44	0.93	5.16	4.09	3.27	8.07	4.59	593.06	600	6.67
3"	2.99	1.02	5.94	4.96	3.86	8.07	4.98	958.84	600	9.82
4"	2.99	1.09	6.50	4.96	4.92	8.07	4.98	1526.59	600	12.57

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.