



MEETS THE DESIGN CRITERIA OF MSS_SP_110.



SERIES 1715 - 1725 COMMERCIAL STYLE

Brass ball valve with solder ends, full port sizes 1/2" to 4".



- Pressure rating 600 WOG-150 WSP.
- Temperature range -4° F to +366 °F.
- Blow out proof stem, chrome plated brass ball.
- P.T.F.E seats, seals, and thrust washer.
- Adjustable stem packing.
- 100% electronically tested in the open and closed position at 80 psi.
- Not to be used for drinking water.
- Valve to be used in fully open or fully closed position.
- ANSI B16.18 connections.

1715: LEVER HANDLE - size 1/2" to 4".

1725: T-HANDLE - size 1/2" to 1".

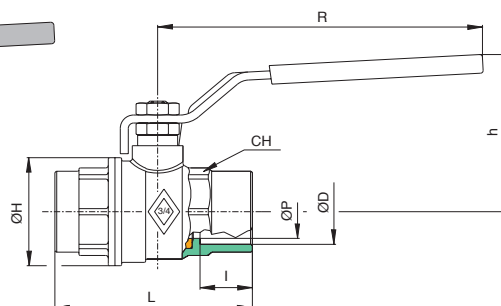

The Buna O-ring is fitted to the stem of the valve as the best possible protection against potential leakage under extreme duty, or low pressure applications. A secondary P.T.F.E stem seal will also assure that the valve is suitable for use up to 366°F.

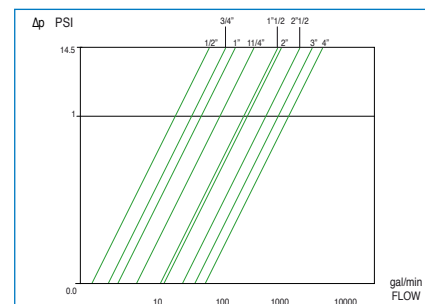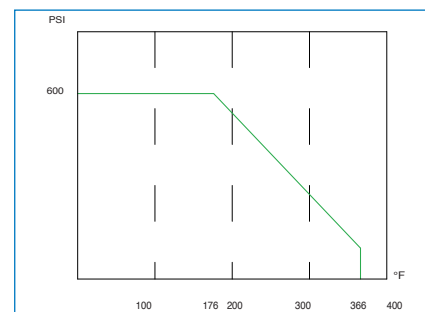

N POS	PART NAME	MATERIAL	N PCS
1	BODY	BRASS C38000	1
2	END CONNECTION	BRASS C38000	1
3	BALL	BRASS C38000	1
4	BALL SEAT	P.T.F.E	2
5	THRUST WASHER/STEM SEAT	P.T.F.E	2
6	O-RING	NBR	1
7	PACKING GLAND	BRASS C38500	1
8	NUT	STEEL 6/S	2
9	STEM	BRASS C38500	1
10	HANDLE	Fe DD11 UNI EN 10111	1

SIZE	ØP	L	I	h	R	ØD	ØH	CH	Cv	psi	Weight Lbs
1/2"	0.57	2.58	0.50	1.81	3.78	0.63	1.30	0.98	18.84	600	0.50
3/4"	0.76	3.00	0.75	2.28	4.76	0.88	1.53	1.22	34.10	600	0.77
1"	0.98	3.56	0.91	2.44	4.76	1.13	1.93	1.49	49.71	600	1.19
1 1/4"	1.26	4.09	0.96	3.00	5.94	1.38	2.32	1.89	102.89	600	2.20
1 1/2"	1.57	4.56	1.10	3.23	5.94	1.63	2.87	2.12	265.90	600	3.24
2"	1.95	5.45	1.34	3.74	6.30	2.13	3.38	2.64	306.36	600	4.21
2 1/2"	2.56	6.90	1.47	4.84	8.11	2.63	4.37	3.54	624.28	600	9.44
3"	3.05	8.05	1.67	5.23	8.11	3.13	5.35	4.13	1009.25	600	14.52
4"	3.94	10.25	2.16	6.49	10.27	4.13	6.53	5.12	1606.94	600	24.83

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

