




SERIES 1715 LF - 1725 LF COMMERCIAL STYLE

Lead free brass ball valve with solder ends, full port sizes 1/2" up to 2".

- Pressure rating 600 WOG-150 WSP.
- Temperature range -4°F to 366°F.
- Blow out proof stem, T.E.A. coated LF brass ball.
- P.T.F.E. seats, seals, and thrust washer.
- Adjustable stem packing.
- 100% electronically tested in the open and closed position at 80 psi.
- Valve to be used in fully open or fully closed position.
- ANSI B16.18 connections.


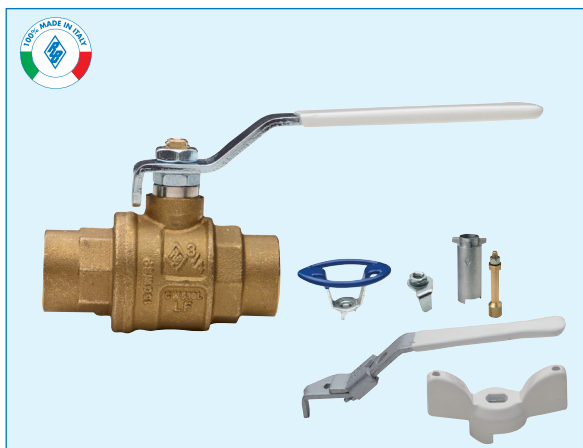


HEALTH
EFFECTS US-CA
NSF 372
NSF 61

TRADITIONAL SWEATING PROCEDURES RECOMMENDED

1715 LF: LEVER HANDLE size 1/2" to 2".

1725 LF: T-HANDLE size 1/2" to 1".

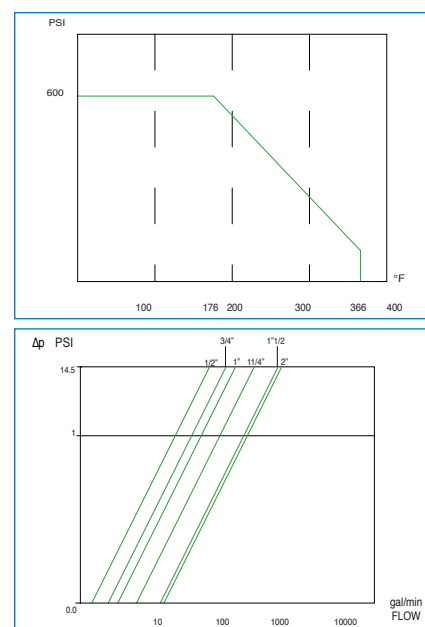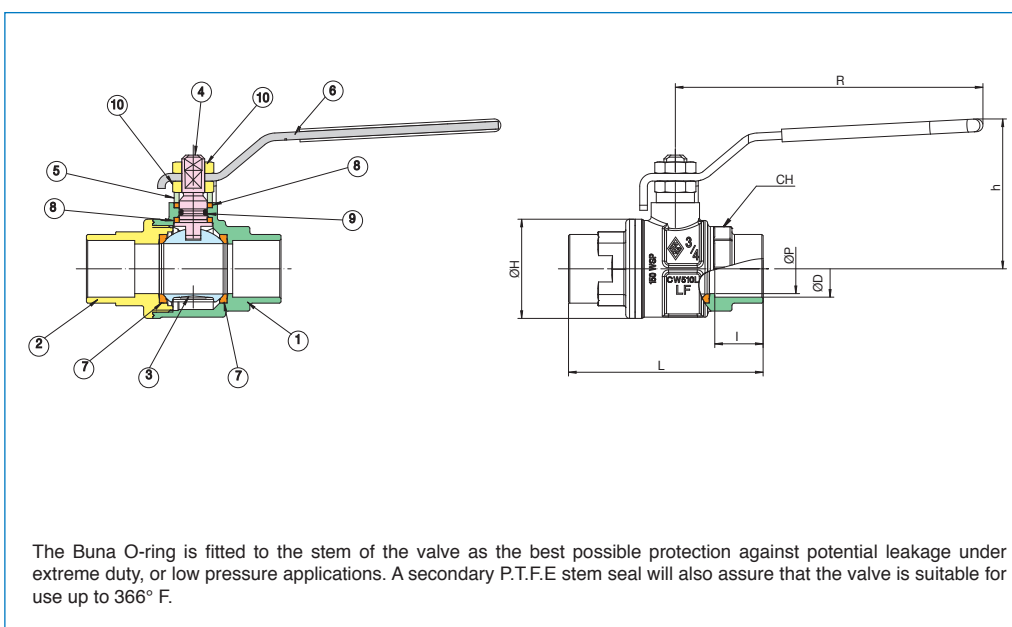

N POS	PART NAME	MATERIAL	N PCS
1	BODY	LF BRASS C28500 *	1
2	END CONNECTION	LF BRASS C28500 *	1
3	BALL	LF BRASS C28500 * TEA COATED	1
4	STEM	LF BRASS C28500 *	2
5	PACKING GLAND	BRASS C38500	2
6	HANDLE	STEEL DD11	1
7	BALL SEAT	P.T.F.E	1
8	THRUST WASHER/STEM SEAT	P.T.F.E	2
9	O-RING	NBR	1
10	NUT	STEEL CL04	1

SIZE	ØP	I	CH	ØD	ØH	L	h	R	Cv	psi	Weight Lbs
1/2"	0.59	0.50	0.98	0.63	1.30	2.58	1.85	3.78	18.84	600	0.49
3/4"	0.79	0.75	1.22	0.88	1.54	3.01	2.32	4.76	34.10	600	0.79
1"	0.98	0.91	1.50	1.13	1.93	3.56	2.48	4.76	49.71	600	1.17
1 1/4"	1.26	0.97	1.89	1.38	2.32	4.09	2.99	5.94	102.89	600	2.14
1 1/2"	1.57	1.10	2.13	1.63	2.87	4.57	3.25	5.94	265.90	600	3.20
2"	1.95	1.34	2.64	2.13	3.43	5.47	3.78	6.30	306.36	600	4.25

* Lead free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content= 0.25%. Source: California health & Safety code (116875). Vermont Act 193.

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.