




## SERIES 2200 SRL STAINLESS STEEL BALL VALVE

Deadman spring return lever, stainless steel, FNPT threaded ball valve.

- Full port sizes 1/4" to 2".
- Temperature range -4° F to 450° F.
- Working pressure to 1000 psi 1/4" - 2"
- Blow-out proof stem.
- Adjustable spring return lever.
- Anti-static design.
- ANSI B1.20.1 connections.

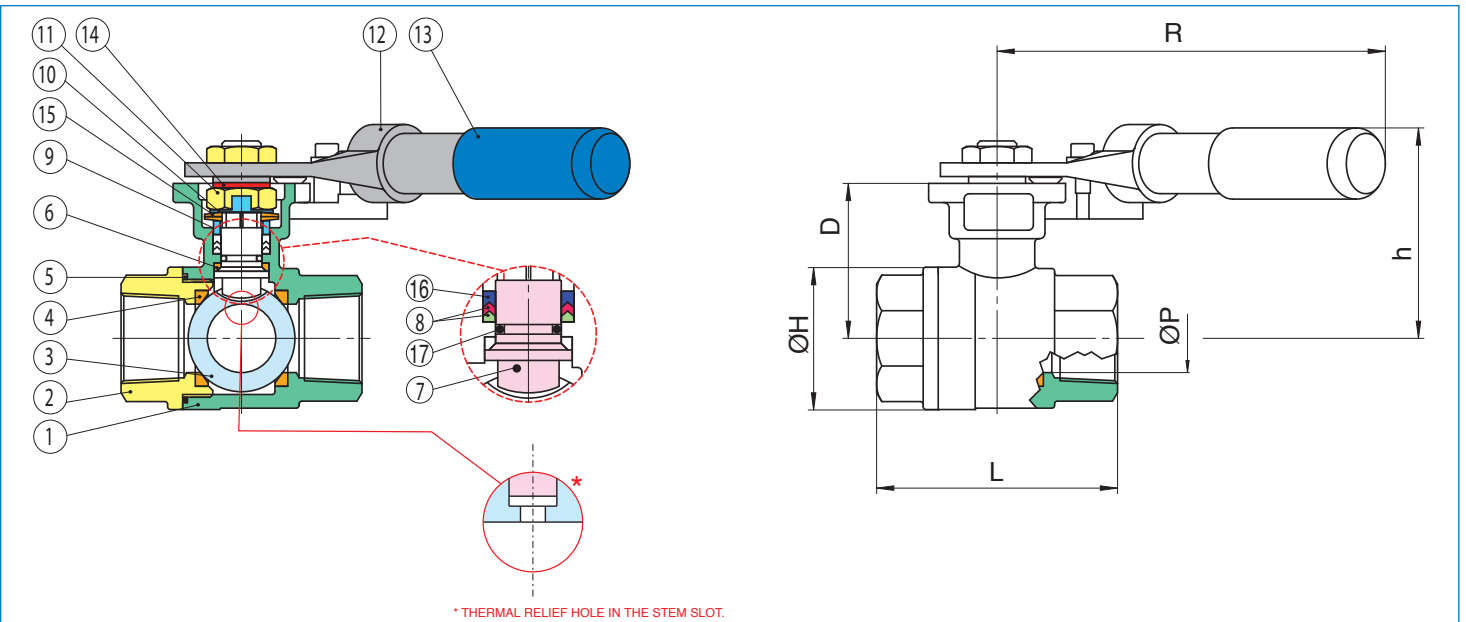

N POS	PART NAME	MATERIAL	N PCS
1	BODY	CF8M	1
2	END CAP	CF8M	1
3	BALL	SS316	1
4	SEAT	P.T.F.E.	2
5	JOINT GASKET	P.T.F.E.	1
6	STEM SEAL	R.T.F.E.	1
7	STEM	SS316	1
8	STEM PACKING	P.T.F.E.	2
9	GLAND	SS304	1
10	LOCK SADDLE	SS304	1
11	STEM NUT	SS304	2
12	HANDLE	SS304	1
13	HANDLE SLEEVE	VINYL	1
14	STEM WASHER	SS304	1
15	BELLEVILLE WASHER	SS301	1
16	STEM PACKING	25% GLASS FIBER FILLED+P.T.F.E	1
17	O-RING	VITON	1

SIZE	ØA	R	D	ØH	h	L	ISO 5211	Cv	psi	Weight Lbs
1/4"	0.45	6.30	1.52	1.46	2.31	2.56	F03/F04	8	1000	1.80
3/8"	0.49	6.30	1.52	1.46	2.31	2.56	F03/F04	10	1000	1.80
1/2"	0.59	6.30	1.52	1.46	2.31	2.56	F03/F04	15	1000	1.70
3/4"	0.79	6.30	1.82	1.69	2.60	2.94	F03/F04	34	1000	2.00
1"	0.98	6.30	2.23	2.05	3.02	3.47	F04/F05	56	1000	2.80
1 1/4"	1.26	6.30	2.40	2.48	3.19	4.02	F04/F05	85	1000	3.80
1 1/2"	1.50	8.27	3.05	2.87	3.84	4.33	F05/F07	125	1000	6.60
2"	1.97	8.27	3.35	3.54	4.14	4.92	F05/F07	250	1000	8.80