

Wilkerson EconOmist® Standard Lubricators

Features:

- 26 oz. bowl
- transparent bowl: solid bottom
metal bowl: manual drain with sight glass
- full view sight dome
- adjustable oil feed
- can be filled under pressure
- quick-disconnect clamp ring for easy bowl removal
- The rate of oil delivery may be controlled by turning the adjusting screw counter clockwise for more and clockwise for less oil delivery. The oil delivery rate will change automatically to deliver more oil during higher air flows and less oil for air flows lower than the one at which the setting was made.
- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **200 PSIG** (14 bar) and **32°F to 150°F** (0°C to 65.5°C)

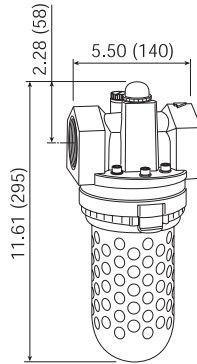


illustration represents L40 series



transparent bowl with guard

F

Size	Flow (SCFM)	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1¼"	927	L40-0AA	\$661.30	L40-0AAMB	\$719.10
1½"	927	L40-0BA	661.30	L40-0BAMB	719.10
2"	1186	L50-0CA	897.05	L50-0CAMB	954.55

See pages 239-241 for lubricator accessories. See page 156 for air tool lubricant. SCFM ratings at 120 PSIG inlet pressure.

Wilkerson Compact Combination Units

Features:

- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **200 PSIG** (13.8 bar) and **32°F to 175°F** (0°C to 80°C)
- Included components:
 - (2) modular sleeves
 - (2) mounting brackets (sleeve and bracket)
 - (2) end blocks

Filter series F16:


- 5 micron element
- 5 oz. bowl

Regulator series R16:

- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

Lubricator series L16:

- 5 oz. bowl
- adjustable oil feed
- full view sight dome



transparent bowl with guard

Size	Flow (SCFM)	With Transparent Bowl and Guard				Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
¼"	36.1	C16-02A	\$635.60	C16-02M	\$577.30	C16-02AMB	\$670.60	C16-02MMB	\$612.30
⅜"	58.5	C16-03A	635.60	C16-03M	577.30	C16-03AMB	670.60	C16-03MMB	612.30
½"	64.0	C16-04A	635.60	C16-04M	577.30	C16-04AMB	670.60	C16-04MMB	612.30



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.