

CODE NUMBER

3325201

DESCRIPTION

Polished Chrome Finish, Top Spud, Single Flush, Battery, Exposed Sensor Urinal/Water Closet Retrofit Flushometer.

DETAILS

• Finish: Polished Chrome (CP)

Power Type: BatteryBattery Life: 3 yearsValve: Diaphragm/Piston

Fixture Type: Urinal/Water ClosetFixture Connection: Top Spud

FEATURES

- "Low Battery" Flashing LED
- "User in View" Flashing LED
- Mechanical Manual Override Flush Handle
- Four (4) Size C Batteries included
- Battery Powered, Sensor Activated, Exposed, OPTIMA® SMOOTH® Unit for Closet and Urinal Flushometer Conversions with the following features:
- 72 Hour Sentinel Flush Mode
- ADA Compliant OPTIMA® SMOOTH® Battery Powered Infrared Sensor for automatic "Hands-free" operation



COMPLIANCES & CERTIFICATIONS





(ADA Compliant, cUPC Certified)

ELECTRICAL SPECIFICATIONS

Arming Delay: 8 secondsBattery Life: 3 years

Control Circuit: 6 VDC Input/72 Hour Sentinel Flush/Solid

• Sensor Range: 26"-32" (660-813mm)

VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- EBV 200 Installation Instructions
- EBV-200-A Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the EBV200A product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com





ROUGH-IN

FRONT VIEW



TOP VIEW



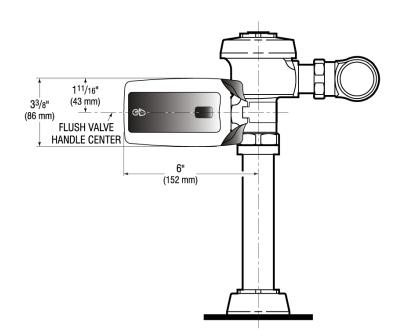

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com