

**Part No:** 1821-030C

**Valves**


**True Union Ball Valve**

**Desc:** 3 CPVC TU2K IND BALL VALVE THD EPDM

**MSRP:** 711.14

**Weight(lbs):** 7.937

**Size:** 3"

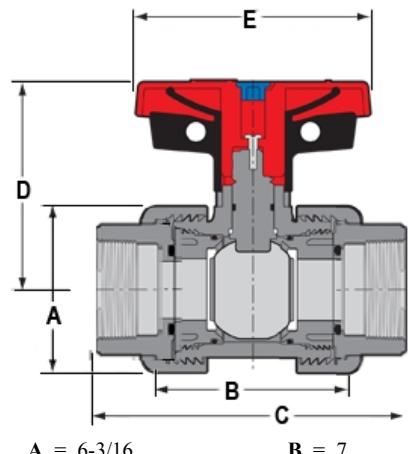

**A** = 6-3/16

**B** = 7

**C** = 9-7/8

**D** = 5-7/8

**E** = 7-5/8

**Cv** = 1416  
**Values**

**Weight(kg):** 3.6

**Weight(gm):** 3600

**Color:** GRAY

**Material:** CPVC

**Type** TU 2000 - Industrial

**O-Ring** EPDM

**Connection** Fipt

**Pressure Rating** 235 psi @ 73° F

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses;  $\pm 1/32$  inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses;  $\pm 1/32$  inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows;  $\pm 1/32$  inch

**L** = Overall length of fittings;  $\pm 1/16$  inch.

**M** = Outside diameter of socket/thread hub;  $\pm 1/16$  inch.

**N** = Socket bottom to socket bottom; couplings;  $\pm 1/16$  inch.

**W** = Height of cap;  $\pm 1/16$  inch

## Typical Molded Dimension References

