

Part No: 42001SR

FlameGuard®

**Special Reinforced (SR)
Transition Fittings**

Desc: 3/4X1/2 CPVC RNFRC D ADJ HD ADPT SOCXFPT

MSRP: 17.63

Part Code: 076

Weight(lbs): 0.653

Weight(kg): 0.296


Weight(gm): 296

Size: 3/4"X1/2"

Color: ORANGE

Material: CPVC

Connection Socket x SR Fipt (Adjustable)

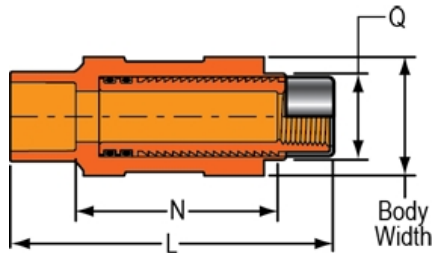

Q = 1- 1/4

L-Min = 6-5/8

L-Max = 8-1/4

N-Min = 4-7/8

N-Max = 6-9/16

**Body
Width** = 2-3/16

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

