

**Part No:** HT2S-524C

**Schedule 80 PVC & CPVC**

**Hot-Tap Saddle**

**Desc:** 6X3/4 CPVC HOT TAP SADDLE EPDM S/S BOLT

**MSRP:** 353.23

**Part Code:** 050

**Weight(lbs):** 2.615


**Weight(kg):** 1.186

**Weight(gm):** 1186

**Size:** 6"X 3/4"SOC(1"SPG)

**Color:** GRAY

**Material:** CPVC

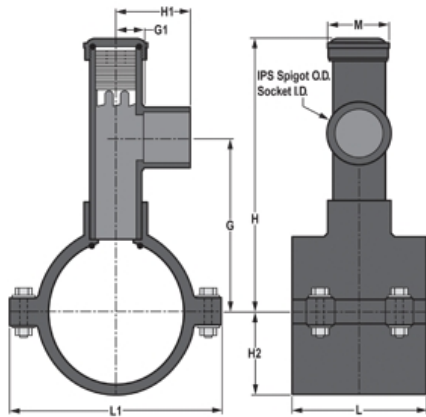

**L** = 3

**G** = 6

**G1** = 1

**H** = 8-5/8

**H1** = 2

**H2** = 3-13/16

**M** = 2

**L1** = 8-3/16

**Connection** Saddle x Socket (Spigot)

**Hardware** SS316

**O-Ring** EPDM

**NOTE** Not intended To Convey Or  
Dispense Water For Human  
Consumption Through Drinking  
Or Cooking

**Cutter** Brass

**Type** Hot-Tap

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses;  $\pm 1/32$  inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses;  $\pm 1/32$  inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows;  $\pm 1/32$  inch

**L** = Overall length of fittings;  $\pm 1/16$  inch.

**M** = Outside diameter of socket/thread hub;  $\pm 1/16$  inch.

**N** = Socket bottom to socket bottom; couplings;  $\pm 1/16$  inch.

**W** = Height of cap;  $\pm 1/16$  inch

## Typical Molded Dimension References

