

Part No: S1720-10FSR

Valves

Swing & Spring Check

Desc: 1 PVC T/U UTILITY SWG CHK VLV SRTHD EPDM

MSRP: 43.47

Part Code: 026

Weight(lbs): 0.791

Weight(kg): 0.359

Weight(gm): 359

Size: 1"

Color: WHITE


Material: PVC

Type Utility Swing Check

Connection SR Fipt (TU)

Body Color White

Pressure Rating 150 psi @ 73° F Full Flow (Open)
75 psi Back Pressure (Closed)

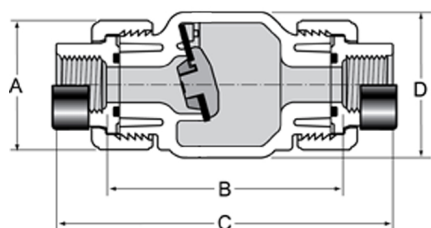

A = 2-11/16

B = 4-9/16

C = 6-1/4

D = 2- 5/8

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

