

Part No: S1720-20FSR

Valves

Swing & Spring Check

Desc: 2 PVC T/U UTILITY SWG CHK VLV SRTHD EPDM

MSRP: 86.9

Part Code: 026

Weight(lbs): 2.308

Weight(kg): 1.047

Weight(gm): 1047

Size: 2"

Color: WHITE


Material: PVC

Type Utility Swing Check

Connection SR Fipt (TU)

Body Color White

Pressure Rating 150 psi @ 73° F Full Flow (Open)
75 psi Back Pressure (Closed)

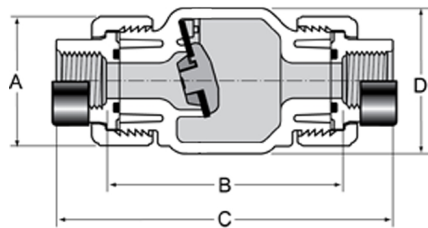

A = 4- 5/16

B = 5-23/32

C = 7-5/8

C = 7-11/16

D = 4- 1/4

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

