

Part No: S1780C12F

Valves

Swing & Spring Check

Desc: 1-1/4 PVC CL TU UTLTY SP CK VLV THD EPDM

MSRP: 93.07

Part Code: 026

Weight(lbs): 1.133

Weight(kg): 0.514

Weight(gm): 514

Size: 1-1/4"

Color: CLEAR


Material: PVC

Type Utility Spring Check

Connection Fipt (TU)

Body Color Clear

Pressure Rating 150 psi @ 73° F Full Flow (Open)
75 psi Back Pressure (Closed)

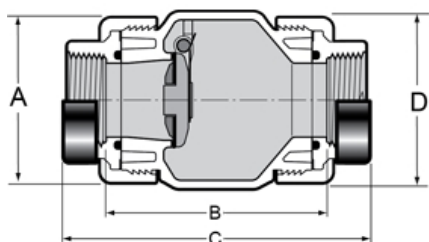

A = 3- 1/8

B = 5- 1/16

C = 6-13/16

D = 3- 3/8

Fabricated Dimension References:

- G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/4 & larger ± 1/2 inch.
- H** = Intersection of center lines to face of fitting; 90° elbows, tees, crosses; ± 1/4 inch.; wyes ± 1/2 inch; 14" & larger inch.
- J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/4 inch; 14" & larger ± 1/2 inch.
- L** = Overall length of fittings; ± 1/2 inch; wyes ± 1 inch; 14" & larger ± 1 inch.
- M** = Outside diameter of socket/thread hub; ± 1/4 inch.
- N** = Socket bottom to socket bottom; couplings; ± 1/2 inch.
- W** = Height of cap; ± 1/4 inch.

Typical Fabricated Dimension References

