


## 5120 Series Lead-Free Mixing Valve

This versatile NSF 61, ASSE 1017, ASSE1070 mixing valve provides the ultimate performance for domestic hot water applications. The 5120 Series ASSE1017 certification allows for domestic hot water storage at temperatures high enough to increase the effective storage capacity of a water heater, kill harmful bacteria and still be delivered at a safe 120°F or less. The ASSE 1070 listing allows for point of use applications within homes, hospitals, schools, nursing homes, public facilities, etc. where a 1070 valve is required.



**NSF® ≤ .25% Lead**

Meets California AB 1953  
and Vermont Act 193

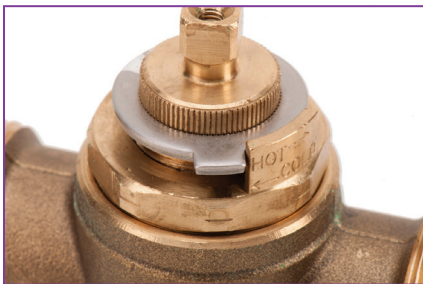

All union models are  
available with a stainless  
steel temperature gauge.



Now available in  
Press-Connect  
Models.



# Submittal Data Information 5120 Series Lead-Free Mixing Valve

NSF<sub>6</sub> ≤ .25% Lead  
Meets California AB 1953  
and Vermont Act 193

Submittal Data # 101-147  
Supersedes: 10/24/16

Effective: 03/17/21

## Features

- ≤ .25% lead
- Dual Listed for ASSE 1017 and 1070
- UPC Certified
- Suitable for use in Potable Water
- Sweat, NPT, Pex, Press & CPVC
- Union Connections
- Check Valves Included
- No Routine Maintenance Required
- Lockable Max. Temperature Setting
- Outlet Temperature Strip
- Optional Dial Gauge and Adaptor

## Performance

- Cv: 1.8
- Max. Flow: 14GPM (54 L/min)<sup>1</sup>  
*<sup>1</sup>Flow should never exceed standards for pipe size*
- Min. Flow: 1GPM (3.8 L/min)<sup>1</sup>
- Hot Supply Temperature: 120-180°F (49-82°C)
- Cold Supply Temperature: 39-80°F (5-27°C)
- Max. Inlet Pressure: 200 psi (13.8 Bar)
- Max. Variation in Supply Pressure: 20%
- Min. Temperature Differential Between Hot Supply and Mixed: 10°F (5.6°C)
- Outlet Temperature Range: 85-120°F (29-49°C)
- Factory set to: 115-120°F (41-45°C)
- Accuracy of Outlet Temperature: (±) 3° F

## Materials

- Body: Forged Brass
- Internal Components: ≤ .25% lead Brass, Noryl GFN2
- Seals: Viton
- Spring: Stainless Steel
- Piston: Polysulfone
- Fittings: Varies (Brass, CPVC, Copper)
- Gaskets: EPDM
- Temperature Gauge: Stainless Steel
- Gauge Fitting: Brass


## Approvals/Listings

- ASSE 1017, ASSE 1070
- cUPC
- CSA125.3




## Application:

The 5120 Series Mixing Valve is designed to control water temperatures for both point of use and point of distribution installations wherever ASSE1070 or ASSE 1017 mixing valves are required. The valves design and advanced thermostatic element ensures a stable mixed water temperature throughout the valves adjustable range.

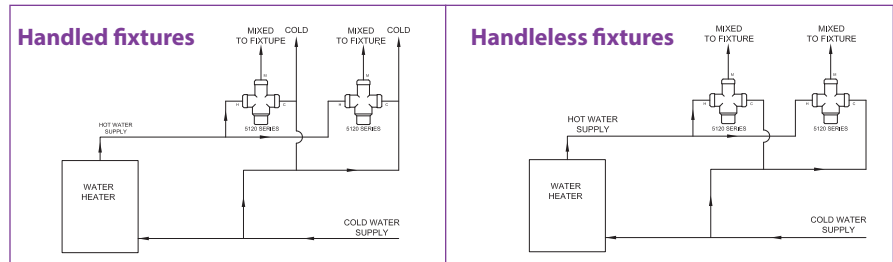

Diagrams not for installation purposes

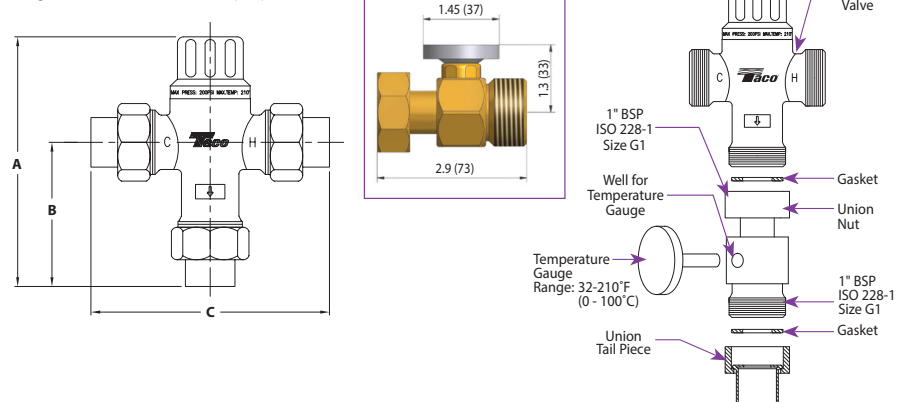

5120 Series Mixing Valve Dimensions *Dimensions for reference only*

Taco Model	Description	A Height		B Lower Height		C Width	
		In.	mm	In.	mm	In.	mm
5120-2	BODY ONLY*	3.8	96.52	1.9	48.3	3.3	83.8
5122-B2	1/2" UNION CPVC	5.8	147.3	3.7	94.0	7.1	180.3
5122-C2	1/2" UNION SWEAT	4.8	121.9	2.7	68.6	4.8	121.9
5122-P2	1/2" UNION PEX	5.0	128.5	2.9	73.7	5.4	137.2
5122-T2	1/2" UNION NPT	5.3	134.6	3.2	81.3	5.8	147.3
5122-H2	1/2" UNION PRESS	4.9	124.5	3.8	96.5	7	177.8
5123-B2	3/4" UNION CPVC	5.8	147.3	3.7	94.0	7.1	180.3
5123-C2	3/4" UNION SWEAT	5.0	127.0	2.9	73.7	5.4	137.2
5123-P2	3/4" UNION PEX	5.1	129.5	2.9	73.7	5.4	137.2
5123-T2	3/4" UNION NPT	5.5	139.7	3.4	86.4	6.3	160.0
5123-H2	3/4" UNION PRESS	7	177.8	3.9	99.1	7.3	185.4
5124-C2	1" UNION SWEAT	6.1	154.9	4.0	101.6	5.4	137.2
5124-P2	1" UNION PEX	5.2	132.1	3.1	78.7	5.8	147.3
5124-H2	1" UNION PRESS	7	177.8	3.9	99.1	7.3	185.4

For models with a gauge add -G to the end of the model number. This will change the total valve height.  
\*Does not include connections



Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360  
Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436