

151XU

Cast Steel Globe Valve

Class 300

Features & Benefits


- Ideal for throttling service
- Flow characteristics permit accurate and repeatable flow control
- Seat ring is seal welded to eliminate leak paths
- Outside screw & yoke
- Bolted Bonnet

Materials

PART	MATERIAL
Body	A216 WCB
Bonnet	A216 WCB
Seat Rings	Hardfaced
Disc	13% CR Overlay
Stem	410 SS
Packing	Graphite
Bonnet Gasket	Spiral Wound
Back Seat	410 SS
Disc Stem Nut	410 SS
Disc Washer	Carbon Steel
Gland	410 SS
Gland Flange	WCB
Eye Bolt	Steel
Eye Bolt Nuts	A563 Gr. A or 0
Pins	-
Bonnet Studs	A193 Gr. B7
Bonnet Nuts	A194 Gr. 2H
Handwheel	WCB
Handwheel Nut	A194 Gr. 2H
ID Tags	SS
ID Pins	Steel



Dimensional Drawing

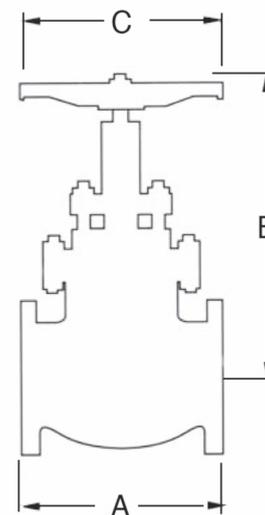

Dimensions & Weights

SIZE (inch)	WEIGHT (lbs)	A (inch)	B VALVE OPEN (inch)	C (inch)
2	75	10.50	16.75	8.00
2½	99	11.50	18.00	10.00
3	132	12.50	21.00	10.00
4	209	14.00	23.00	14.00
6	440	17.50	36.00	18.00
8	693	22.00	39.00	24.00
10	1008	24.50	41.00	24.00
12	1100	28.00	48.00	24.00

Industry Standards

STEEL VALVES	ANSI B16.34
FACE-TO-FACE/END-TO-END	ANSI B16.10
FLANGE DIMENSIONS	ANSI B16.5
TESTING	API 598
ACCEPTANCE	API RP591

Intermediate pressure ratings shall be determined by interpolation.

SIZE RANGE: 2 - 12 inches **PRESSURE TEMPERATURE RATING:** Class 300

Carbon Steel
ASTM A216 Grade WCB
740 psi @ -20°F to 100°F