

Part No: 1829V-020C

Valves


True Union Ball Valve

Desc: 2 CPVC TU2K INDBV SOC/FPT EPDM VENTED

MSRP: 436.59

Weight(lbs): 3.393

Size: 2

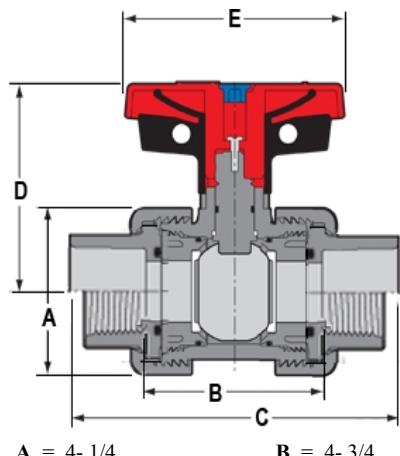

A = 4- 1/4

B = 4- 3/4

C = 7- 3/4

D = 4- 1/2

E = 5- 1/8

Cv = 599

Values

Weight(kg): 1.539

Weight(gm): 1539

Color: GRAY

Material: CPVC

Type TU 2000 - Industrial

O-Ring EPDM

Connection Socket + Fipt (Vented)

Pressure Rating 235 psi @ 73° F

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm 1/32$ inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; $\pm 1/32$ inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/32$ inch

L = Overall length of fittings; $\pm 1/16$ inch.

M = Outside diameter of socket/thread hub; $\pm 1/16$ inch.

N = Socket bottom to socket bottom; couplings; $\pm 1/16$ inch.

W = Height of cap; $\pm 1/16$ inch

Typical Molded Dimension References

