

Medical & Lavatory Faucets

T	AG
---	----


B-2485

Concealed Widespread Lavatory Faucet

Architect/Engineering Specifications:

Adjustable concealed deck mount mixing faucet, polished chrome plated cast spout with 2.2 GPM aerator, compression cartridges with spring checks, 4" wrist action handles, chrome plated escutcheons, 12" flexible stainless steel supply hoses to spout and 1/2" NPT male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name				
Model Specified	Quantity			
Variations Specified				
Date				

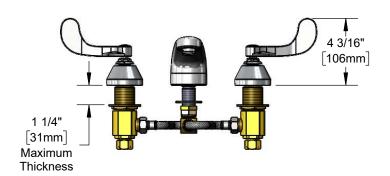

5 1/8" [30mm]

Features & Benefits:

- Adjustable concealed deck mount mixing faucet w/ forged brass side bodies
- · Polishd chrome plated brass cast spout
- 2.2 GPM aerator, Series 3 (B-0199-03)
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent the cross flow of water
- 4" wrist action handles w/ color coded indexes
- 12" flexible stainless steel supply hoses to spout
- 1/2" NPT male inlets w/ coupling nuts
- Adjustable centers from 6" to 24"
- Material: Forged brass side bodies, chrome plated metal handles & chrome plated brass cast spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

LOW LEAD COMPLIANT

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 2.2 GPM @ 60 psi

ADA Compliant

Optional Outlets (Series 3 / VR Series 8)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	□ Lever □ 4-Arm
0.35 0.5 1.0 1.2 1.5 2.2	N/A N/A N/A □ B-0199-03-F12 □ B-0199-03-WS Standard		N/A N/A □ B-0199-08-F12	 □ B-0199-08-N035 □ B-0199-08-N05 □ B-0199-08-LF10 N/A □ B-0199-08-LF15 □ B-0199-28 	Optional Cartridges Quarter-Turn Cerama w/ Check Valve Quarter-Turn Eterna w/ Spring Check (Standard) Push Button Metering Pivot Action Metering Wrist Action Metering







T&S BRASS AND BRONZE WORKS, INC.



Optional Handles

☐ 4" Wrist Action (Standard)